
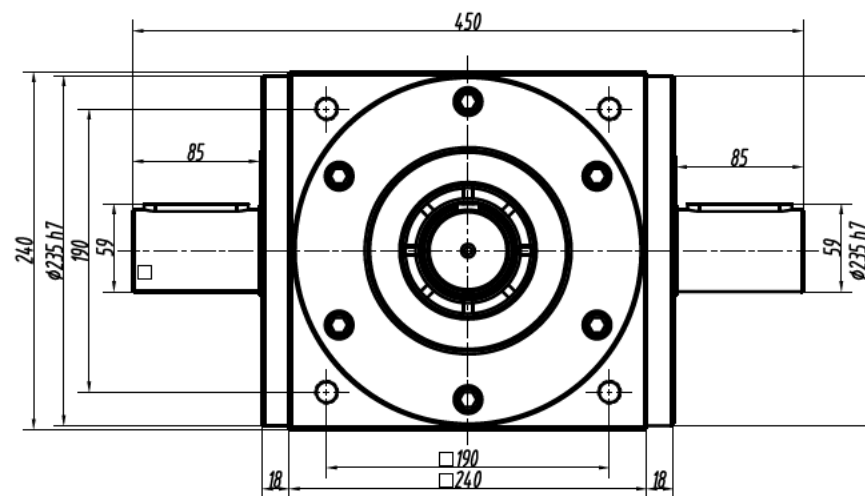


input / output
Same four axes

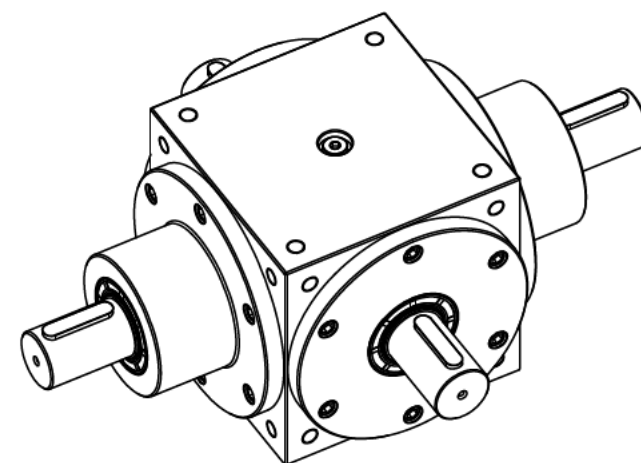

Rated input speed	1000rpm	Max.input speed			1500rpm	
Max.radial force	9600N	Max.axial force			4800N	
Maximum efficiency	≥96%	Operating temp			-25° ~ +90°	
Installation method	arbitrarily	Lubrication mode		Permanent lubrication		
Weight	75KG	Average life span			20000h	
Standard back ash	≤15arcmin	Noise			≤65 dB	
Speed ratio		1:1	2:1	3:1	4:1	5:1
Rated output torque (Nm)		530	600	680	660	650
Maximum output torque (Nm)		795	900	1020	990	975

Update Date:	01/2026
---------------------	---------

www.em-intech.ru

